

Classic Series

C6 II · 370-395W MWT Mono PERC Half-Cut Module

21.1%

Module efficiency up to 21.1%

Australian Version

Manufactured in China

Features


- Innovative Layout**
 Innovative back contact module layout with asymmetric design for higher efficiency power
- High Efficiency**
 Busbar-free design increases cell conversion efficiency, more power output can be achieved at low irradiance conditions
- High Reliability**
 Conductive back sheet's 2D encapsulation avoids welding stress and micro crack, resulting lower degradation under multiple harsh testing conditions
- High ROI**
 Single-glass modules with global 30-year performance warranty bring higher return on investment
- Aesthetic Design**
 The design of busbar and tapping ribbon free makes module more aesthetic
- Lead Free**
 Eco-friendly PV design achieves lead-free MWT module without soldering materials

Reinsurance Coverage for 30 Years

15 year
Quality
Warranty

30 year
Performance
Warranty

Insured by PAIC and LLOYD'S
PING AN LLOYD'S

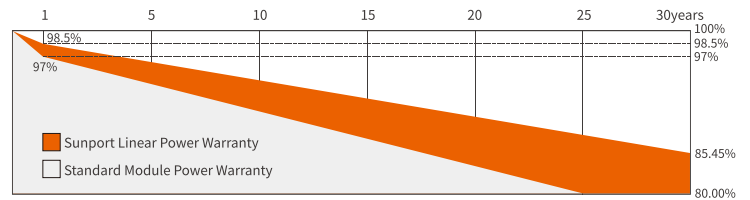

※1st year degradation less than 1.5%, 30 years linear power output 85.45% guaranteed.

Comprehensive Qualifications & Certifications

- ★CQC Top Runner Advanced Technology Certification (4A class)
- ★ISO 9001:2015 Quality Management System
- ★ISO 45001: 2018 Occupation Health Safety Management System
- ★TUV NORD Certification
- ★ISO 14001:2015 Environment Management System



Electrical Characteristics at Standard Test Conditions(STC)

Spec/Model	Unit	SPP370QHEH	SPP375QHEH	SPP380QHEH	SPP385QHEH	SPP390QHEH	SPP395QHEH
Max-Power(Pm)	W	370	375	380	385	390	395
Power Tolerance	W			0~+5			
Max-Power Voltage(Vm)	V	35.3	35.5	35.7	35.9	36.1	36.3
Max-Power Current(I _m)	A	10.49	10.57	10.65	10.73	10.81	10.89
Open-Circuit Voltage(Voc)	V	42.6	42.8	43.0	43.2	43.4	43.5
Short-Circuit Current(I _{sc})	A	11.02	11.10	11.18	11.26	11.34	11.42
Module Efficiency(η _m)	%	19.8	20.1	20.3	20.6	20.9	21.1

STC: AM=1.5, Irradiation 1000W/m², Module Temperature 25°C Power Tolerance ±3%

Electrical Characteristics at Nominal Module Operating Temperature (NMOT)

Spec/Model	Unit	SPP370QHEH	SPP375QHEH	SPP380QHEH	SPP385QHEH	SPP390QHEH	SPP395QHEH
Max-Power(Pm)	W	278	282	286	290	294	298
Max-Power Voltage(Vm)	V	32.5	32.7	32.9	33.1	33.3	33.5
Max-Power Current(I _m)	A	8.56	8.63	8.7	8.77	8.83	8.90
Open-Circuit Voltage(Voc)	V	39.8	40.0	40.2	40.4	40.6	40.8
Short-Circuit Current(I _{sc})	A	8.96	9.02	9.08	9.14	9.20	9.26

NMOT: Irradiation 800W/m², Ambient temperature 20°C, Wind Speed 1m/s

Temperature Coefficient

Nominal Module Operating Temperature	43±2°C
Temperature coefficient of P _{max}	-0.36%/°C
Temperature coefficient of Voc	-0.28%/°C
Temperature coefficient of I _{sc}	0.06%/°C

Package

Transportation	Container Size	Quantity(pcs)	Quantity(per pallet)
Container	40' HQ	864	36

Mechanical Characteristics


Dimension(L×W×H)	1805mmx1035mmx30mm
Weight	20 kg
Glass Type	High Transmittance Anti-reflective Coated Tempered Glass /3.2mm
Solar Cell	126(21x6) / Mono / Half-cell
Encapsulant	EVA
Frame	Anodized Aluminum Alloy / Silver
Junction Box	IP68
Cable	4mm ² , 350mm (+) / 150mm (-); Customizable
Connector	TL-CABLE01S Jiangsu Tongling Electric Co.,Ltd.
Fire safety class:	Class C accprding to ANSI/UL 1703-2018 (as per ANSI/UL 790-2018)

Operating Conditions


Max System Voltage	DC1500V(TUV)
Max Fuse Rated Current	20A
Operating Temperature Range	-40°C~+85°C
Mechanical Load	5400Pa (front) /2400Pa (rear)
Max Allowable Hail Load	φ25mm hail, from 1m of distance at 23 m/s
Application Class	Class A

I-V Curve

I-V Curve at different irradiation (SPP385QHEH)

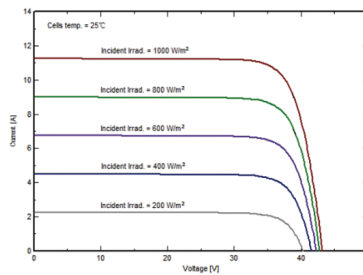

I-V Curve at different temperature (SPP385QHEH)

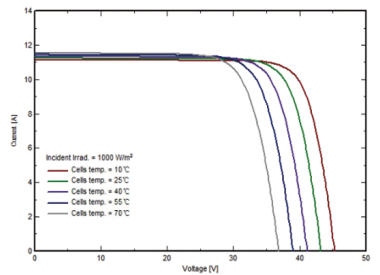

Module Size

