




DMEGC *Quality. Performance. Value.*

DM395M10-54HBB/-V
DM400M10-54HBB/-V
DM405M10-54HBB/-V
DM410M10-54HBB/-V
DM415M10-54HBB/-V

Power tolerance:0-5W

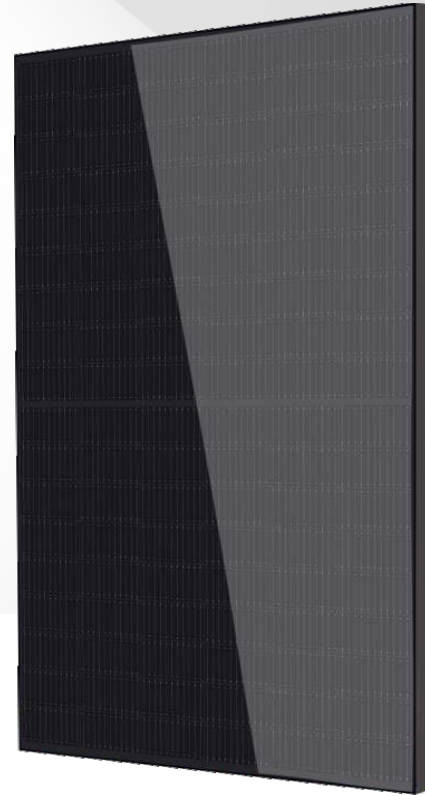

Technology

High module conversion efficiency through superior manufacturing technology



DMEGC cell inside

Over decade cell production experience
Qualified by most of module manufacturers
5G enhanced manufactory



Performance

High performance under low light conditions
(Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality, Health and Safety, Environmental Management Systems(ISO9001, ISO14001, ISO45001)



Value

Assured by the manufacturer who is the very most healthy PV provider



Social responsibility

SA8000 certified by TÜV Nord
Low carbon footprint traceable



Service


Local office support, immediate response

Superior Manufacturing-Quality Assurance




- TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% two EL tests

Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly

Warranty

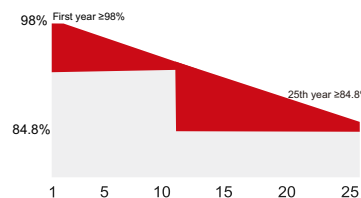

- 12 Years product warranty
- 25 Years power output warranty
- 0.55% Annual Degradation Over 25 years

A Member of the Hengdian Group

Ver:20211129A2

Electrical Specifications


* STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°

Module Type	Pm(W)	Tolerance	Imp(A)	Vmp(V) ²	Isc(A)	Voc (V)	Module Efficiency%
DM395M10-54HBB/-V	395	±3%	13.10	30.18	13.50	37.09	20.39%
DM400M10-54HBB/-V	400	±3%	13.19	30.35	13.59	37.21	20.65%
DM405M10-54HBB/-V	405	±3%	13.28	30.52	13.68	37.33	20.91%
DM410M10-54HBB/-V	410	±3%	13.37	30.69	13.77	37.45	21.17%
DM415M10-54HBB/-V	415	±3%	13.46	30.86	13.86	37.57	21.43%

Tolerance: P_{max}±3%; V_{oc}±3%; I_{sc}±4%

Mechanical Data

Cell Type	P type Mono-crystalline
Cell Arrangement	108(6x18)
Module Structure	Glass/Encapsulant/Backsheet
Glass Thickness	2.8mm
PV module classification	Class II
Junction Box Rating	IP67/IP68
Cables	4mm ² /1100mm or Customized Length
Connector Type	MC(PV-KST4/xy-UR;PV-KBST/xy-UR)
Fire Rating Class	Class C

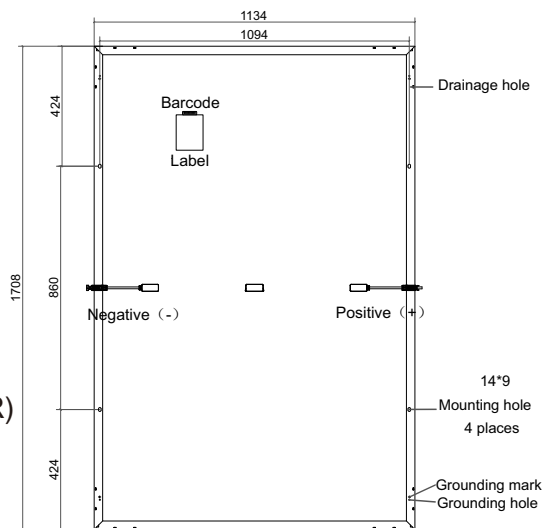

(Back side)
Note:mm

Maximum Ratings



Operating Temperature	-40°C to +85°C
Maximum System Voltage	1000V DC(IEC)
Maximum Series Fuse Rating	25A
Number of Diodes	3

Packaging

Module Dimensions	1708x1134x30mm
Weight	22.8kg
Container	40' HQ
Pieces per Pallet	36
Pieces per Container	936

Temperature Characteristics

Temperature Coefficient of I _{sc}	+0.0448%/°C
Temperature Coefficient of V _{oc}	-0.246%/°C
Temperature Coefficient of P _{max}	-0.330%/°C

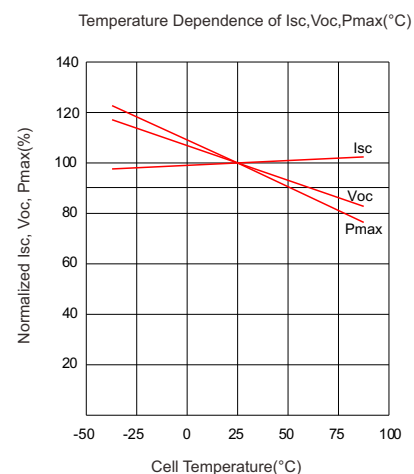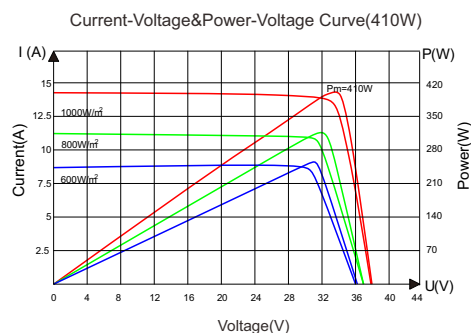

Statement: Due to technological progress, product parameters will be adjusted accordingly; When signing the contract, the latest data of the company shall prevail.



Hengdian Group DMEGC Magnetics Co., Ltd.
Hengdian Industrial Zone, Dongyang City
Zhejiang Province, China 322118

Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
Email: solar@dmegc.com.cn
Made in China

www.dmegcsolar.com